



4000 & 4000 H

OVERLOCK & CHAIN STITCH SEWING MACHINES

DOUBLE NEEDLE FOUR THREAD OVERLOCK & CHAIN
STITCH SEWING MACHINES

- WITH TOP AND BOTTOM FILLER CORD FEEDS, DEVELOPED FOR BIG BAG (FIBC) PRODUCERS
- DOUBLE TRANSPORT FROM ABOVE AND BELOW
- TO BE USED FOR SEWING HEAVY BIG BAGS




4000 Series Classic Spring System

4000 H Series With Pneumatic Presser Foot System



4000 & 4000 H OVERLOCK & CHAIN STITCH SEWING MACHINES

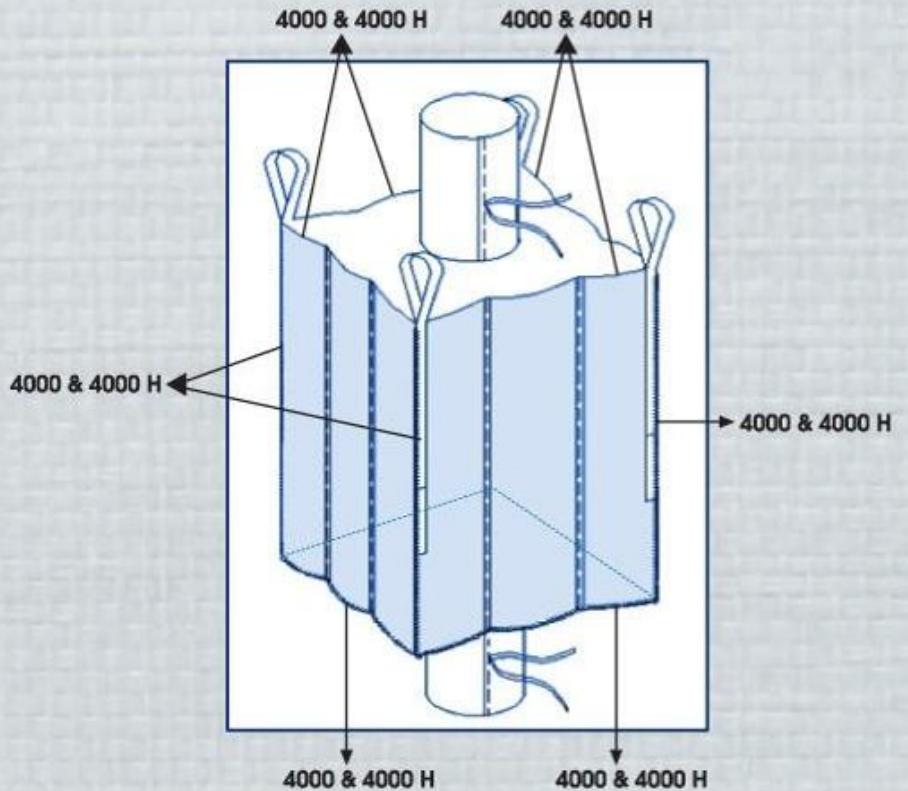

The 4000 series machines are designed for Big Bag producers to sew overlock and safety stitches simultaneously. They possess superior characteristics as well as important modifications to sew today's more difficult Big Bags more efficiently compared to similar machines.

CHARACTERISTICS

- Feeding of filler cord from above and below.
- Low spare part consumption.
- Heat cutting can be mounted if desired.

TECHNICAL SPECIFICATIONS

Maximum speed	1400 rpm
Needle(s)	Two needles
Standard needle	9853 GA 430/172
Threads	Four threads
Stitch spacing	6-13 mm.
Space between two needles	5 mm.
Overlock stitch width between	10 mm and 17 mm
Maximum stitch height	22 mm.