



4500A & 4500AH & 4500B & 4500BH OVERLOCK SEWING MACHINES

SINGLE NEEDLE TWO THREAD OVERLOCK SEWING MACHINES

- DOUBLE TRANSPORT FROM ABOVE AND BELOW
- FILLER CORD FEED FROM ABOVE AND BELOW DEVELOPED FOR BIG BAG PRODUCERS
- USED FOR OVERLOCK STITCH FOR HEAVY BIG BAGS



4500A & 4500B

Series Classic Spring System


4500AH & 4500BH

Series With Pneumatic Presser Foot System





4500A & 4500AH & 4500B & 4500BH OVERLOCK SEWING MACHINES

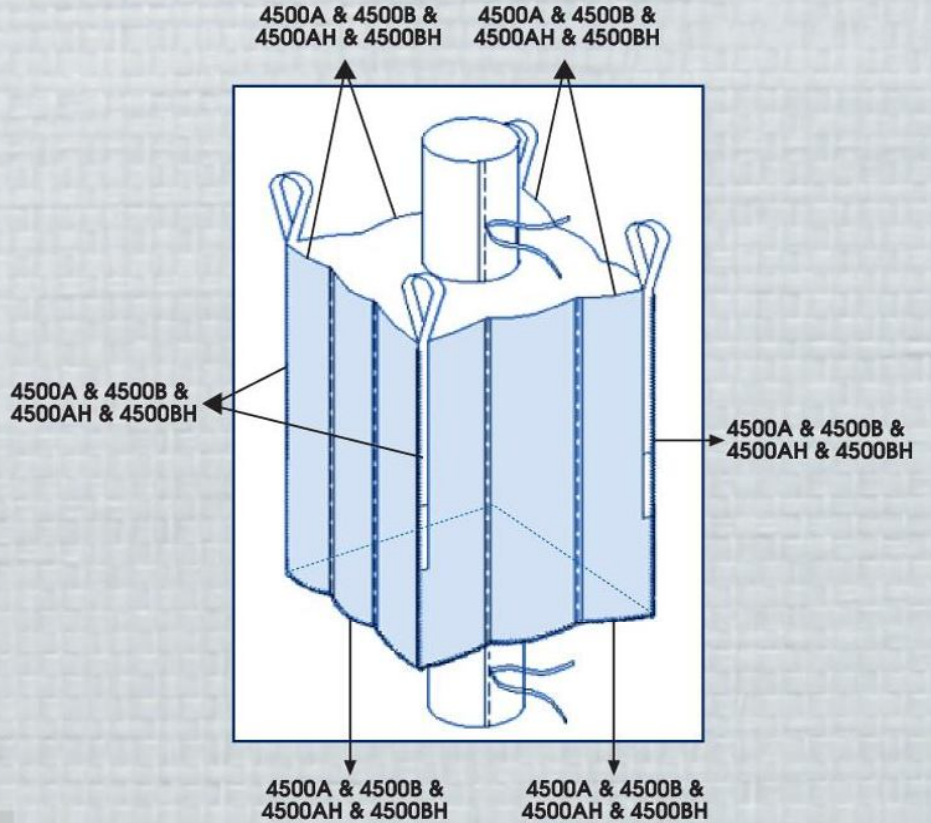

FEATURES

- Standard Filler cord feed from above and below.
- Heat Cutting can be mounted if desired.
- Has a low spare parts consumption.
- If desired by the user, an apparatus can be attached to use felt or filler tape between two fabrics.

TECHNICAL SPECIFICATIONS

Maximum speed (RPM)	1400 RPM
Needle (4500A & 4500AH)	9853 GA 430/172
Needle (4500B & 4500BH)	9853 GA 300/120
Threads	Two threads
Overlock stitch width	19 mm (Standard)
Overlock stitch width	10-12-15 mm according to desire
Maximum stitch height	20 mm

ORSAN OPS MAKİNE SANAYİ TİCARET LİMİTED ŞİRKETİ

MARMARA SANAYİ SİTESİ P-BLOK NO: 413 – 414 İKİTELLİ / İSTANBUL / TÜRKİYE

TEL: +90 212 472 08 78 / 79 / 80 FAX: +90 212 472 08 81

www.orsanops.com info@orsanops.com