



SS 3000, SS 3000H, SS 3000-2, SS 3000-2H CHAIN STITCH SEWING MACHINE

SINGLE OR DOUBLE NEEDLE SEWING MACHINE WITH DOUBLE TRANSPORT FROM ABOVE AND BELOW

- SPECIAL DESIGN FOR BIG BAG (FIBC) PRODUCERS
- USED FOR SEWING HEAVY DUTY BIG BAGS
- FILLER CORDS ARE STANDARD FROM ABOVE AND BELOW

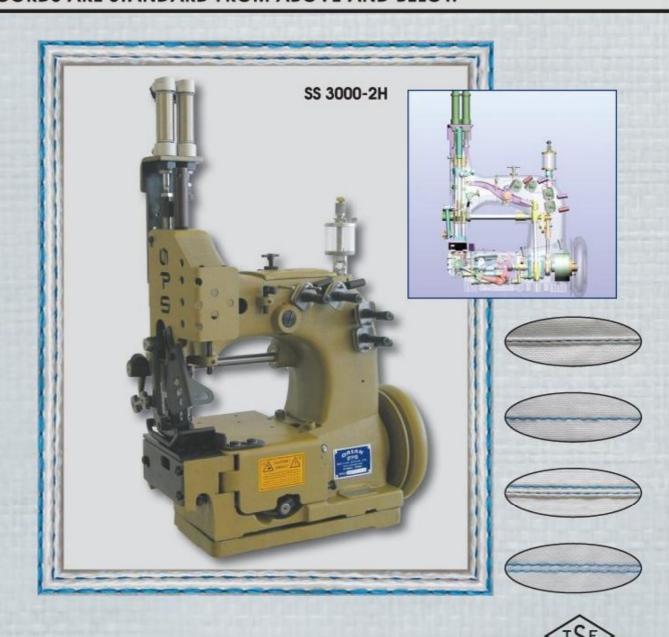






SS 3000, SS 3000H, SS 3000-2, SS 3000-2H CHAIN STITCH SEWING MACHINE

SEWING MACHINE WITH DOUBLE TRANSPORT FROM ABOVE AND BELOW



FEATURES

- This machine is especially developed only for the Big Bag industry.
- It is used in sewing the top and bottom panels of a Big Bag to its body and in the sewing of baffle panels.
- The entire mechanism which gives movement to the upper feed dog has been moved into the body of the machine. This provides ease of movement for the operator, particularly while sewing baffle panels.
- Filler cords are standard from above and below.
- It has a very high pulling strength to easily sew the thickest fabrics.
- It can sew spouts of smaller diameter than sewn by similar machines.
- Heat cutting can be installed if desired.
 Low spare parts consumption.

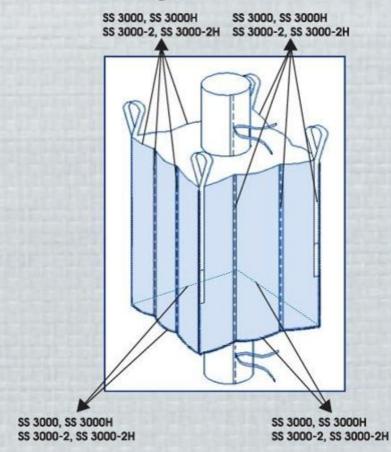

TECHNICAL SPECIFIC	ATIONS
Maximum Speed	1400 rpm
Needle	9848 G - 300/120
Thread	SS 3000 & SS 3000-H two thread, SS 3000-2 & SS 3000-2H four thread
Stitch spacing	6-12 mm.
Heat cutting	All preparations are completed, Heat cutting unit can be installed.